



# SGD-M-30W

## Shingles PERC technology Solar Panel

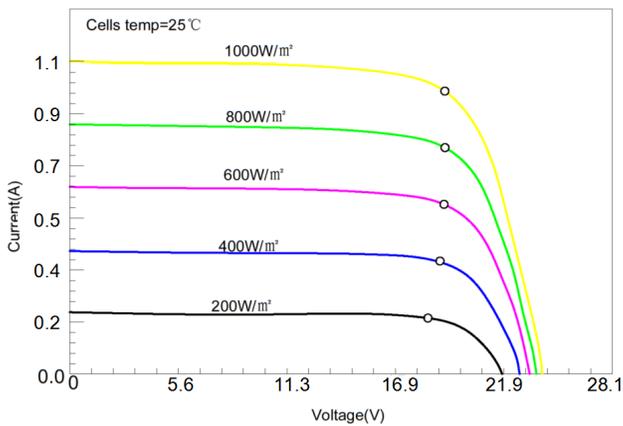


### Module Diagram

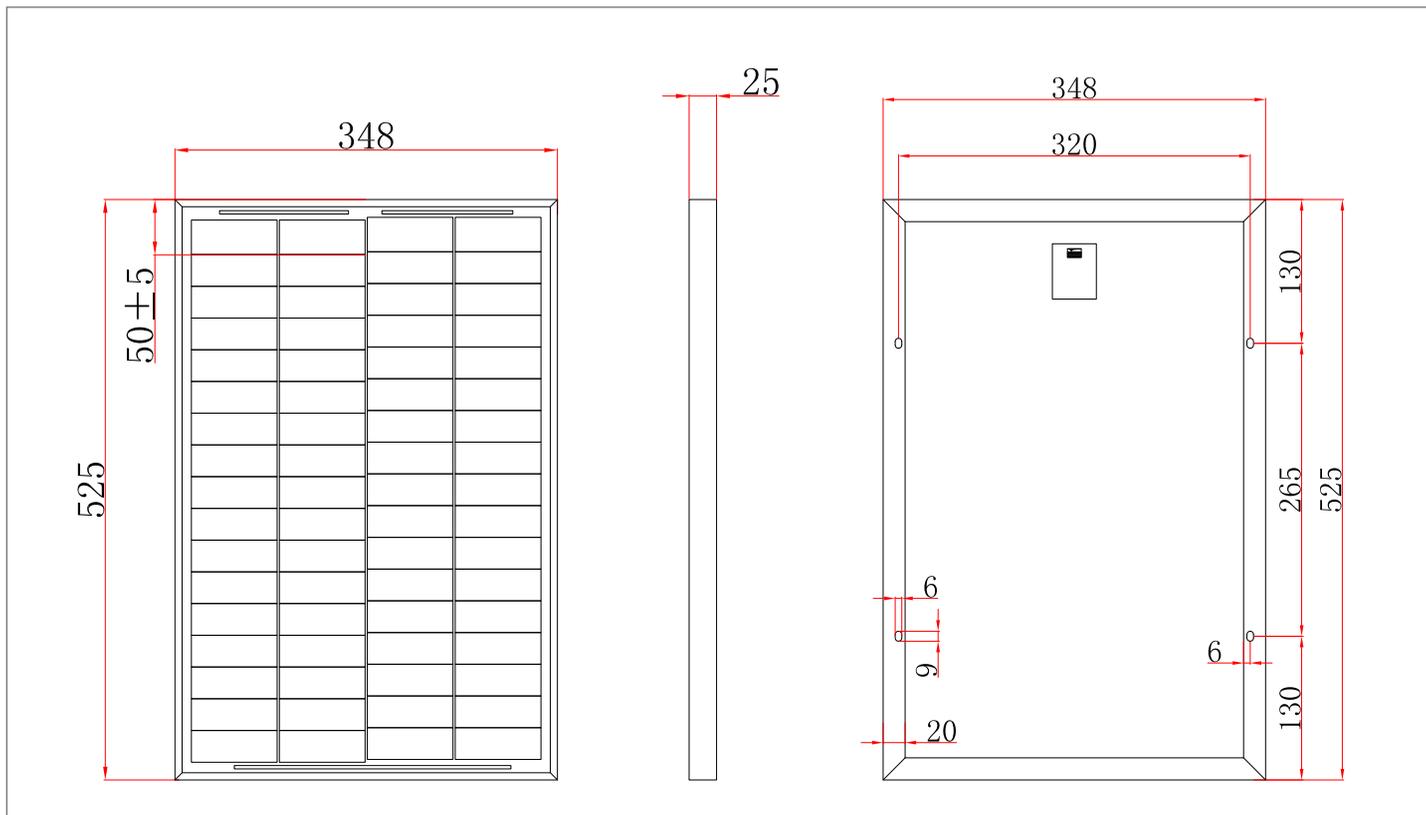

### Electrical Characteristics

Maximum power(Pmax)	30W
Open-circuit voltage(Voc)	20.8
Voltage at Pmax(Vmp)	17.6
Short-circuit current(Isc)	1.81
Current at Pmax(Imp)	1.70
Cells Efficiency(%)	21.24%
The maximum system voltage	1000VDC(IEC)
Power temperature coefficient	-0.43%/°C
Voltage temperature coefficient	-0.34%/°C
Current temperature coefficient	0.05%/°C
Output power tolerance	±3%
Operating Temperature	-40~85°C

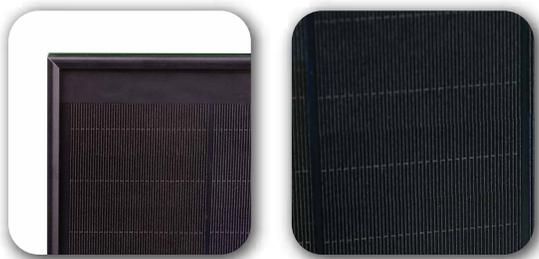

— Product details —

### Specifications

Solar cell brand	Mono
No.of cells and connections	68(4*17)
Module dimension	525*348*25mm
Weight	2.01KG
Waterproof junction box	IP65/IP67
Warranty	10 year and service life 25 years