



SGLW-E-100W20V


Lightweight Solar Panel (LE Series)

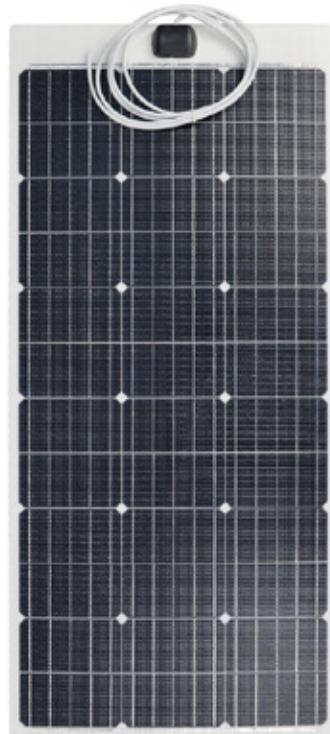

— Lightweight material —

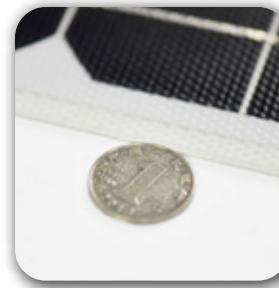

Module Diagram

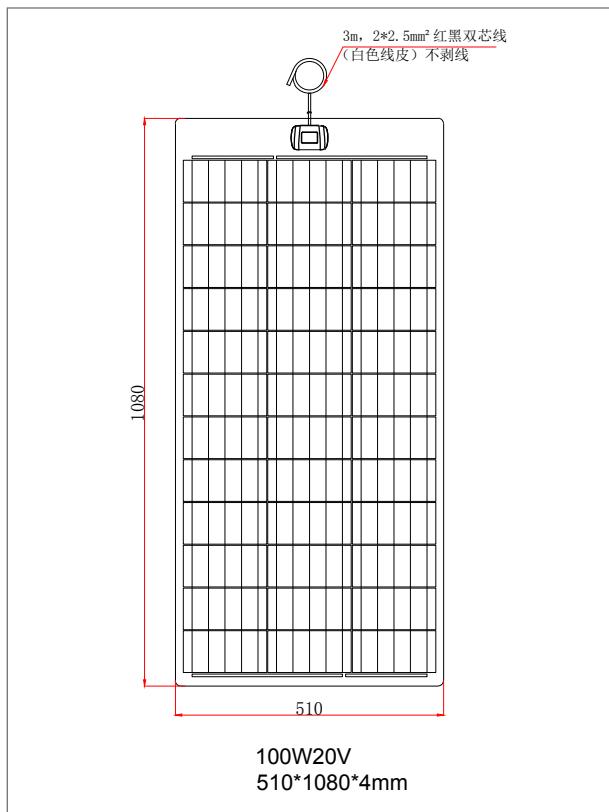

Electrical Characteristics

| | |
|---------------------------------|-------------|
| Maximum power(Pmax) | 100W |
| Open-circuit voltage(Voc) | 23.4 |
| Voltage at Pmax(Vmp) | 19.8 |
| Short-circuit current(Isc) | 5.35 |
| Current at Pmax(Imp) | 5.06 |
| Cells Efficiency(%) | 22.40% |
| The maximum system voltage | 200VDC(IEC) |
| Power temperature coefficient | -0.43%/°C |
| Voltage temperature coefficient | -0.34%/°C |
| Current temperature coefficient | 0.05%/°C |
| Output power tolerance | ±3% |
| Operating Temperature | -20°C~75°C |

Specifications

| | |
|-----------------------------|----------------------------------|
| Solar cell brand | A grade solar cells |
| No.of cells and connections | 36(3*12) |
| Module dimension | 510*1080*4mm |
| Weight | - |
| Waterproof junction box | IP65/IP67 |
| Warranty | 1 year and service life 10 years |

LE-100W (Also suitable for this model)